




printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime

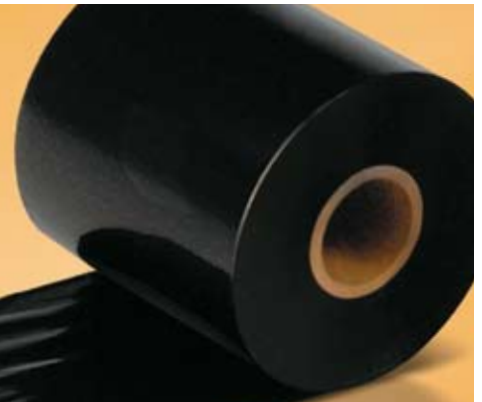

Wax

Technical Specifications

Color Code Tab.....	Purple
Maximum Print Speed	12 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness.....	7.5 Microns
Transmission Density	1.45
Ink Melting Point.....	62°C/144°F

Sample High Mark Ribbons

Part # CES11011 – 110mm x 50m – CSI
 Part # CES11012 – 110mm x 50m – CSO

High Mark

General Purpose Wax

Added Durability

Benefits

- Prints at low heat settings
- Specially formulated backcoat protects the printhead
- Outstanding print performance on coated stocks
- Offers higher durability than most waxes on coated stocks

Recommended Stock

Coated paper tag and label stocks
 Polyethylene films
 Polypropylene films



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

*First in service. Impressions that last.*SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com