




First in service. Impressions that last.SM

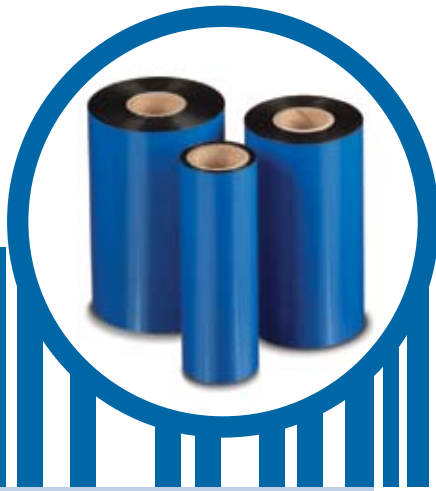

Wax

Fast Wax

General Purpose Wax

Economy Wax

Benefits

- Prints at fast speeds
- Prints at energy levels well below most competitive wax ribbons
- Excellent print quality on uncoated stocks
- Backcoat protects printhead
- Reliable, solid-performing wax ribbon

Recommended Stock

Uncoated paper tag and label stocks

Coated paper tag and label stocks

Technical Specifications

Color Code Tab.....	Yellow
Print Speed.....	12 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness...	7.6 Microns
Transmission Density	1.85
	MacBeth Scale
Ink Melting Point.....	64°C/147°F

Sample Fast Wax Ribbons

- Part # CES11003 -110mm x 50m - CSI
- Part # CES11004 -110mm x 50m - CSO



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

First in service. Impressions that last.SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com