



printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime



Wax/Resin

Technical Specifications

Color Code Tab.....	Black
Print Speed.....	10 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness.....	10.0 Microns
Transmission Density	2.2
	MacBeth
	Scale
Ink Melting Point.....	75°C/167°F

Sample PM350A Ribbons
 Part # CES11015 -110mm x 50m - CSI
 Part # CES11016 -110mm x 50m - CSO

PM350A

Premium Wax/Resin

A Solid TTR Performer




Benefits

- Outstanding print quality on a wide range of substrates
- Stands up to rough handling, abrasion or moderate solvents
- Excellent durability
- Backcoat protects printhead

Recommended Stock

Coated and uncoated paper tag and label stocks
 Polyolefin
 Polypropylene
 Polyethylene

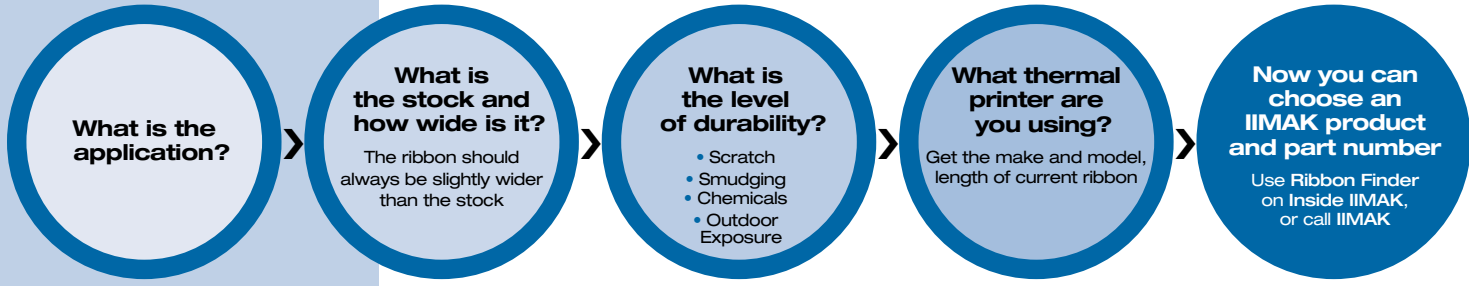

What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS
 For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

*First in service. Impressions that last.*SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**
 Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com