




printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime

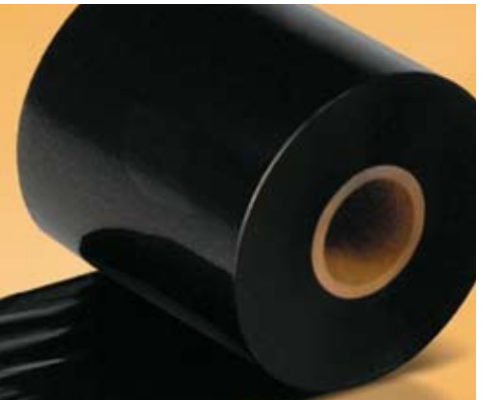

Resin

Technical Specifications

Color Code Tab..... Blue
 Maximum Print Speed 6 IPS
 Film Thickness..... 4.5 Microns
 Total Ribbon Thickness..... 6.2 Microns
 Transmission Density 1.00
 MacBeth Scale

Ink Melting Point..... 110°C/230°F

Sample SP330 Ribbons

Part # CES11019 - 110mm x 50m - CSI
 Part # CES11018 - 110mm x 50m - CSO

UL and CSA Labeling Reference:

Avery Fasson: UL MH17205, CSA 97198
 FLEXcon: UL MH16635, CSA 99214
 3M: UL MH16411

SP330

Super Premium Resin

The ultimate in durability



Benefits

- Maximum durability for harsh environment labeling
- Highest level of resistance to abrasion, heat, steam and various chemicals
- Prints exceptionally on high end films including polyester, vinyl and polyamide

Recommended Stock

Polyester films
 Vinyl
 Polyamide films



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

*First in service. Impressions that last.*SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com