




First in service. Impressions that last.SM

Specialty Resin

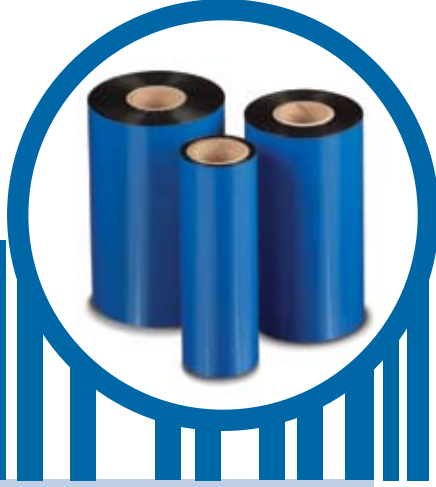

SP-500

Super Premium Specialty Resin

Technical Specifications


Color Code Tab.....	Blue
Print Speed.....	6 IPS
Film Thickness.....	4.6 Microns
Total Ribbon Thickness...	8 Microns
Transmission Density	1.30
	MacBeth
	Scale
Ink Melting Point.....	90°C/203°F

Benefits

- Specially designed for care wash labeling applications
- Excellent resistance to home washing
- Good resistance and durability for ironing and dry cleaning
- Heat resistant up to 300° C on polyamide

Recommended Stock

- Nylon
- Polyester
- Acetate
- Polyamide

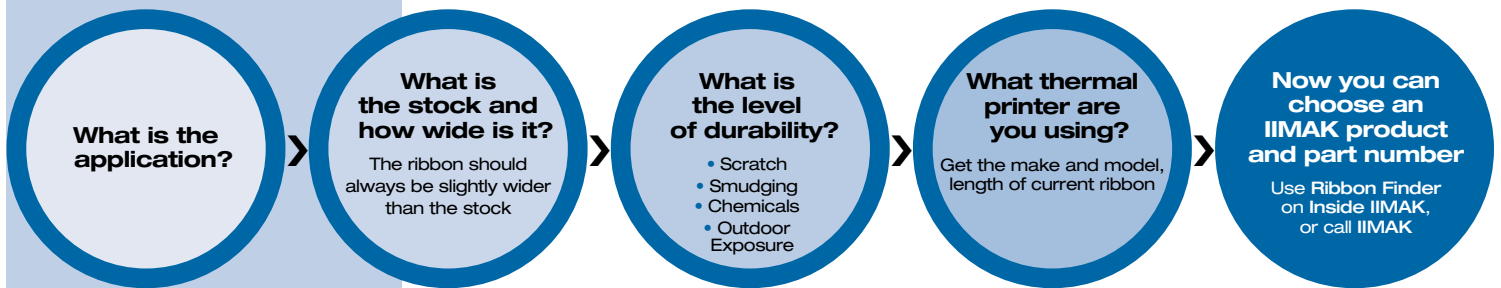

What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

First in service. Impressions that last.SM



310 Commerce Drive
Amherst, NY 14228
Call toll-free: **888.464.4625**
Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
Phone: **716.691.6333**
Fax: **716.691.3395**
Email: salesinfo@iimak.com