




printhead cleaner built in your ribbon.

- Built right into your thermal transfer ribbons
- Preventative maintenance
- Fast and easy to use
- Maintains excellent print quality
- Prolongs printhead life
- Minimizes costly downtime

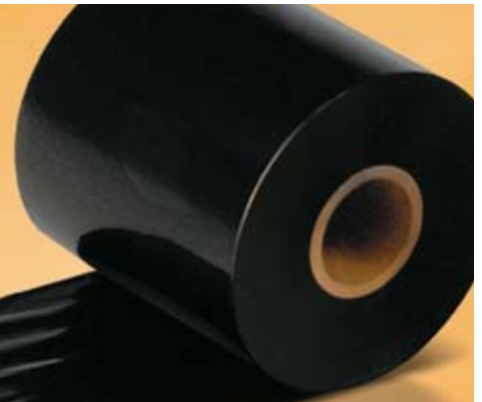

Wax

Technical Specifications

Color Code Tab.....	Clear
Print Speed.....	12 IPS
Film Thickness.....	4.5 Microns
Total Ribbon Thickness.....	8.6 Microns
Transmission Density	2.7
Ink Melting Point	65°C/149°F

Sample GP725 Ribbons

Part # CES11075 -110mm x 50m - CSI
 Part # CES11074 -110mm x 50m - CSO

GP725

Resin Enhanced Wax



Capable and Cost Effective

Benefits

- Deep, dark bar codes, text and graphics
- Easy to use, no printer adjustment needed
- Unbeatable performance at high speeds
- Prints on a wide range of stocks
- Good durability
- Anti-static - ideal for RFID
- Guardian2 backcoat extends printhead life

Recommended Stock

Coated and uncoated paper tag and label stocks
 Polyethylene films (i.e. Polyart)
 Polypropylene films (i.e. Kimdura)



What you need to know to quote ribbon business.

Thermal Transfer Ribbon STORAGE CONDITIONS

For optimal print results, thermal transfer printing should occur in the temperature range of 41° F to 95° F at 45% to 85% relative humidity. Suggested storage conditions for up to one year duration are 23° F to 104° F at 20% to 85% relative humidity. Exposing IIMAK thermal transfer ribbons to direct sunlight or moisture will cause damage to the ribbons.

*First in service. Impressions that last.*SM



310 Commerce Drive
 Amherst, NY 14228
 Call toll-free: **888.464.4625**
 Fax toll-free: **888.329.0260**

Order On-line: www.iimak.com
 Phone: **716.691.6333**
 Fax: **716.691.3395**
 Email: salesinfo@iimak.com